PRODUCTION SPECIFICATIONS

C. C. C. PART NO. -3078-

CUSTOMER ELECTRONIC BRAZING THEIR NO.

CAPACITY 2X.01 MFD. TOL. +20 – 10 % DATE 3-28-62

VOLTAGE RATING 1500 V. D. C. IMPREGNATION MINERAL OIL

CONSTRUCTION SEXTON CAN $1\frac{5}{16}" \times \frac{41}{64}" \times 1\frac{1}{16}$ H.

SKETCH

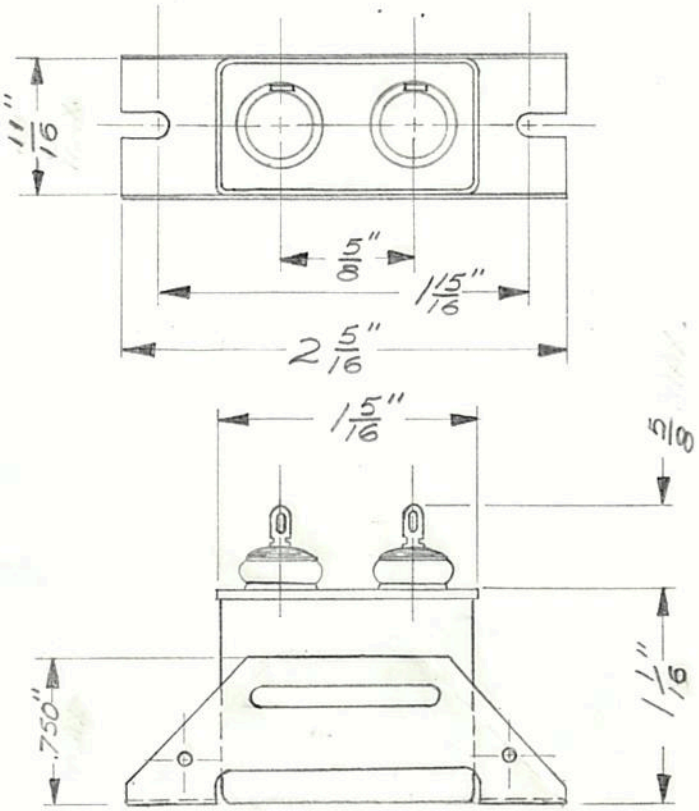

BILL OF MATERIALS

REQ'D	NO.	DESCRIPTION
2	3078W	WINDING
1	3307-A	CAN & COVER
1	3049	MINERAL OIL
1	3316	BRACKET
2	2499	TERMINAL ASS'Y
—	—	WIRES
—	50/50	R. C. SOLDER

TEST SPECIFICATIONS

RATED CAPACITY 2 x .01 MFD. TOL. $\pm \frac{20}{10}$ %

HIGH .12 M.F.D.

LOW .09 M.F.D.

RATED VOLTAGE 1500 V. D.C.

TEST VOLTAGE 2250 V. D.C.

MAX. DISP. FACTOR .75 %

NOTES:

REMARKS:



Property of Chicago Condenser Corporation, Reproduction of any part strictly Prohibited