


Part Number	ADP250A605JL	Revision	AK
Customer P/N	60P64-13	Revision	AK
Capacitance	6	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	
Insulation Resistance	167	MegOhms minimum	


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.47	0.03
Thickness (T)	0.63	0.03
Height (H)	1.04	0.03
Bracket Height (Hb)	0.62	max.
Bracket Spacing (Z)	0.50	0.03
Bracket Width (Wb)	0.47	.....

*Dimensions in inches*

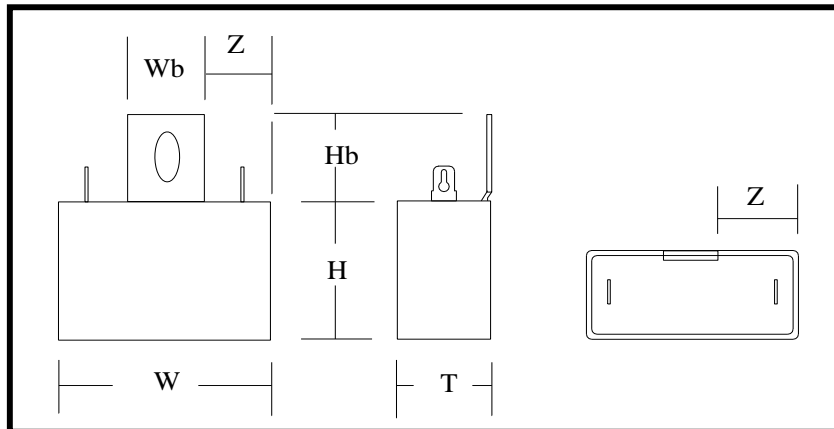

	ADP250A605JL
	6 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	RU, cRU RoHs

Approval: J. D. Aldana  
 Date February 15, 2007