


Part Number	ADP250E166J-M1	Revision
Customer P/N	195-016-0250	Revision
Capacitance	16 uF.	Tolerance 5%
Voltage	250 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Single .250" X .03" Quick Connect Terminals	
Operating Temperature	-40	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Width (W)	1.85	0.05
Thickness (T)	0.79	0.05
Height (H)	1.30	0.05
Total Thickness (Tt)	1.22	0.05
Mounting Hole	0.17	0.01

*Dimensions in inches*

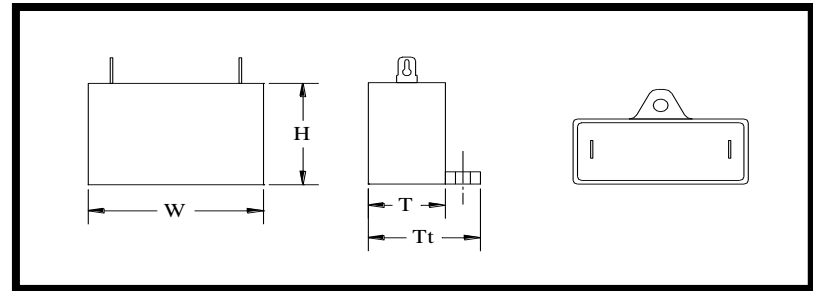

Stamping

(Logo) ADP  
 16 uF 5% 250 VAC  
 -40 - +85 C.  
 50 - 60 Hz.  
 Motor Cap - CBB61  
 195-016-0250  
 RU, cRU RoHs



UL Approved Capacitor

Terminals to be oriented along the "T" dimension.

Approval: J.D. Aldana  
 Date: July 16, 2013