


Part Number	ADP250E166J		Revision
Customer P/N			Revision
Capacitance	16	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.89	0.05
Thickness (T)	0.98	0.05
Height (H)	1.44	0.05
Total Thickness (Tt)	1.32	0.05
Mounting Hole	0.17	0.01

Dimensions in inches

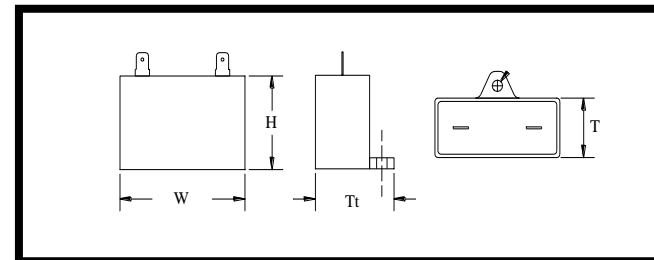

Stamping

ADP
16 uF 5% 250 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap



RU, cRU, RoHS

G = RoHS compliant

UL Approved Capacitor

Terminals to be oriented along the "W" dimension.

Approval JD Aldana
 Date May 26, 2006