


Part Number	ADP250E306J-M1		Revision
Customer P/N			Revision
Capacitance	30	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	1.18	0.03
Height (H)	1.69	0.03
Total Thickness (Tt)	1.61	0.03
Mounting Hole	0.17	0.01

Dimensions in inches

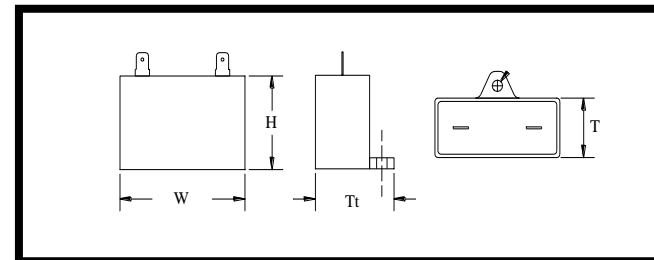

Stamping

(Logo) ADP250E306J-M1
30 uF 5% 250 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap
CBB61
RU, cRU RoHs



G = RoHs compliant

UL Approved Capacitor

Terminals Straight and Centered. Epoxy must fill entire case.

Approval JD Aldana
 Date **February 22, 2010**