


Part Number	ADP250E306J-M4	Revision
Customer P/N	195-573-0250 6100-4147	Revision
Capacitance	30 uF.	Tolerance 5%
Voltage	250 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Single .250" X .03" Quick Connect Terminals	
Operating Temperature	-40	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.30	0.04
Thickness (T)	1.00	0.04
Height (H)	1.46	0.04
Total Thickness (Tt)	1.46	0.04
Mounting Hole (M)	0.18	0.02
Mounting Tab Thickness(Tb)	0.19	Max.


Dimensions in inches

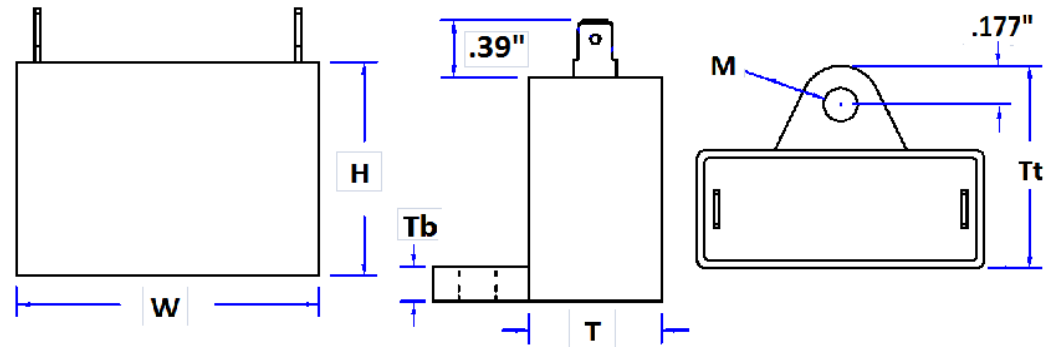

UL Approved Capacitor

Stamping

ADP
 30 uF 5% 250 VAC
 -40 - +85 C.
 50 - 60 Hz.

 US Motor Cap CBB6-1
 195-573-0250 6100-4147
 E166700 RU, cRU RoHs Date Code

Terminals to be oriented along the "T" dimension.
BLACK Color Case ONLY

Engineer J. D. Aldana
 Date February 14, 2012