


Part Number	ADP250E306J		Revision
Customer P/N			Revision
Capacitance	30	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.27	0.03
Thickness (T)	1.18	0.03
Height (H)	1.75	0.03
Total Thickness (Tt)	1.50	ref.
Mounting Hole	0.17	0.01

Dimensions in inches

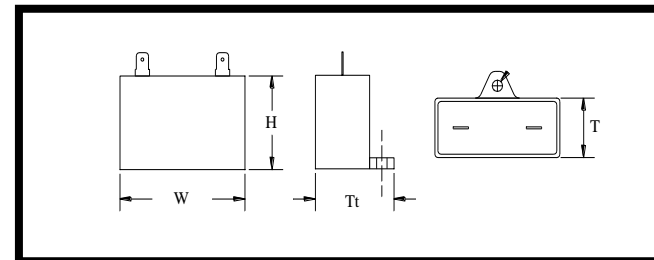

Stamping	ADP
	30 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	CBB61
	RU, cRU RoHs



UL Approved Capacitor



G = RoHs compliant

Approval JD Aldana
 Date August 13, 2009