


Part Number	ADP250E356J-M1		Revision	A
Customer P/N			Revision	A
Capacitance	35	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Single .250" X .03" Quick Connect Terminals			
Operating Temperature	-25	to	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.97	0.03
Thickness (T)	1.26	0.03
Height (H)	1.69	0.03
Total Thickness (Tt)	1.69	0.03
Mounting Hole	0.17	0.01

Dimensions in inches

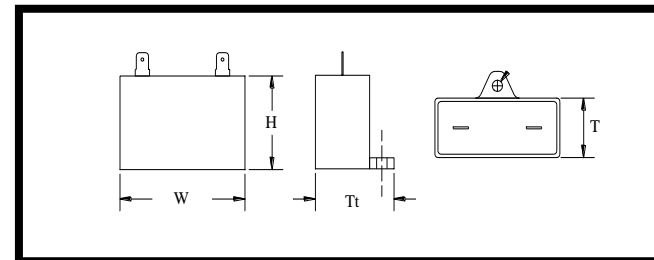

Stamping	ADP250E356J-M1
	35 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	CBB61
	RU, cRU RoHs



G = RoHs compliant

UL Approved Capacitor

Terminals Straight and Centered. Epoxy must fill entire case.

Approval JD Aldana
 Date **February 25, 2010**