


|                       |  |          |                     |
|-----------------------|--|----------|---------------------|
| Part Number           | <b>ADP250E505J</b>                                 | Revision |                     |
| Customer P/N          | <b>494-30634</b>                                   | Revision |                     |
| Capacitance           | <b>5</b>   | uF.      | Tolerance <b>5%</b> |
| Voltage               | <b>250</b>   | VAC      |                     |
| Dielectric            | <b>Metallized Polypropylene</b>                    |          |                     |
| Terminal Type         | <b>Single .250" X .03" Quick Connect Terminals</b> |          |                     |
| Operating Temperature | <b>-25</b>   | to       | <b>85 °C.</b>       |
| Dissipation Factor    | <b>0.001</b>                                       | maximum  | @ 60 Hz.            |

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


|                      | Dimension   | Tolerance   |
|----------------------|-------------|-------------|
| Width (W)            | <b>1.97</b> | <b>0.03</b> |
| Thickness (T)        | <b>0.81</b> | <b>0.03</b> |
| Height (H)           | <b>1.20</b> | <b>0.03</b> |
| Total Thickness (Tt) | <b>1.18</b> | <b>ref</b>  |
| Mounting Hole        | <b>0.17</b> | <b>0.01</b> |

*Dimensions in inches*

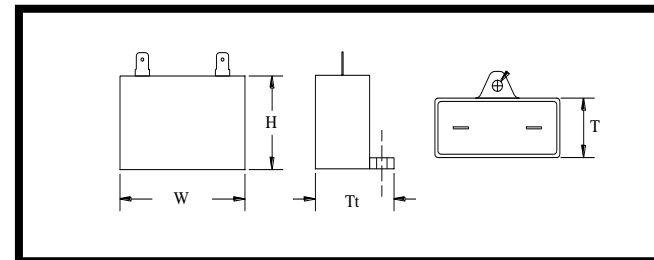

Stamping

**ADP**  
**5 uF 5% 250 VAC**  
**-25 - +85 C.**  
**50 - 60 Hz.**  
**Motor Cap**  
**494-30634**  
**RU, cRU RoHs**



G = RoHs compliant

**UL Approved Capacitor**



Approval JD Aldana  
 Date January 31, 2000