


Part Number	ADP250E605JL		Revision
Customer P/N			Revision
Capacitance	6	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.
Insulation Resistance	167	MegOhms minimum	


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.50	0.03
Thickness (T)	0.73	0.03
Height (H)	1.14	0.03
Bracket Height (Hb)	0.55	0.02
Bracket Spacing (Z)	0.81	0.02
Bracket Width (Wb)	0.47	±0.01

*Dimensions in inches*

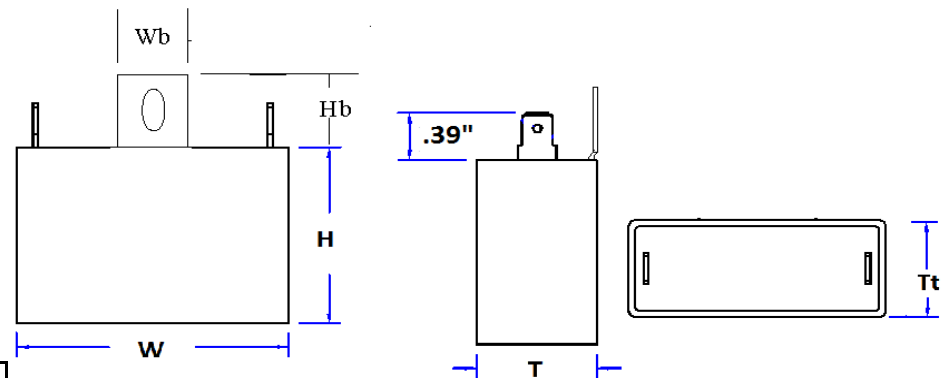

	Stamping
	<p>ADP          6 uF 5% 250 VAC          -25 - +85 C.          50 - 60 Hz.          Motor Cap          CBB61          YU, cYU RoHs</p>

Bracket Mounting Hole to be 0.150" Round - not Slotted - Termin

Engineer J. D. Aldana  
 Date September 28, 2010