


Part Number	ADP250F505J		Revision
Customer P/N			Revision
Capacitance	5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.54	0.03
Thickness (T)	0.77	0.03
Height (H)	1.12	0.03
Total Thickness (Tt)	1.17	0.06
Mounting Hole	0.18	0.02

Dimensions in inches

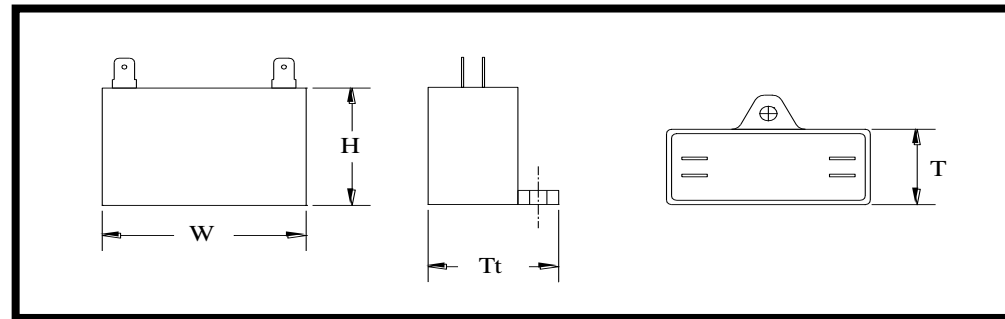

UL Approved Capacitor

	Stamping
	ADP
	5 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	RU, cRU RoHs



Approval: J.D. Aldana
 Date: February 2, 2000