

Part Number	ADP250G156K		Revision	
Customer P/N			Revision	
Capacitance	15	uF.	Tolerance	10%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.05	0.03
Thickness (T)	0.89	0.03
Height (H)	1.40	0.03
Total Thickness (Tt)		
Wire Length (G)		
Wire Gauge (Gw)	AWG	
Wire Color (Cw)		
Mountng Tab Thickness (Mt)		

Dimensions in inches

Stamping	ADP
	15 uF 10% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	RU, cRU RoHs

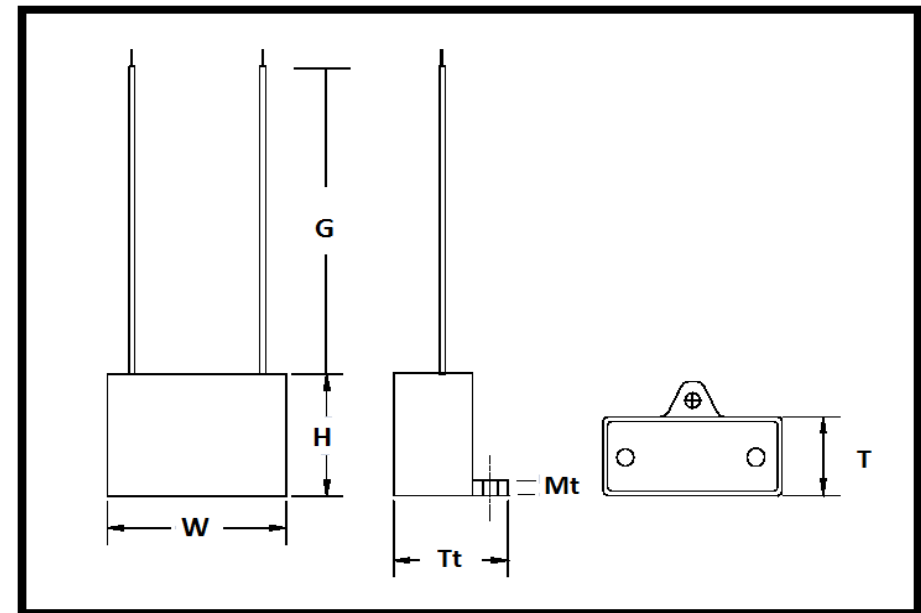

UL Recognized Component

Approval: J.D. Aldana
 Date: January 31, 2000