


Part Number	ADP250H106J		Revision
Customer P/N			Revision
Capacitance	10	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.01	0.03
Thickness (T)	1.18	0.03
Height (H)	1.57	0.03
Total Thickness (Tt)	1.61	0.06
Wire Length (G)	3.00	0.50
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	RED	
Mountng Tab Thickness (Mt)	0.19	0.02

Dimensions in inches

Stamping	ADP
	10 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	
	RU, cRU RoHs

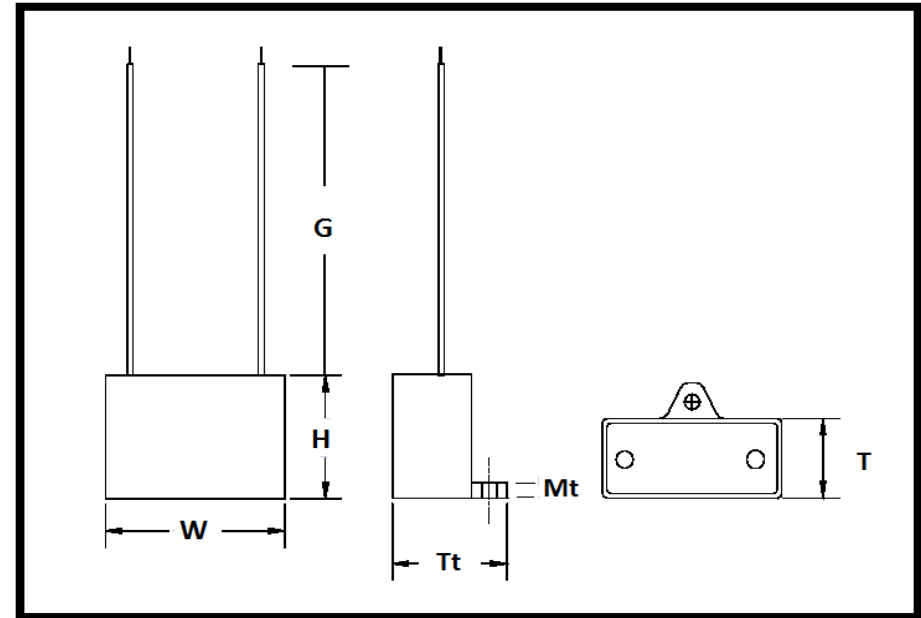

UL Recognized Component

Approval: J.D. Aldana
 Date: January 31, 2000

