

Part Number	ADP250M106J	Revision	7
Customer P/N	6100-9148	Revision	
Capacitance	10	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


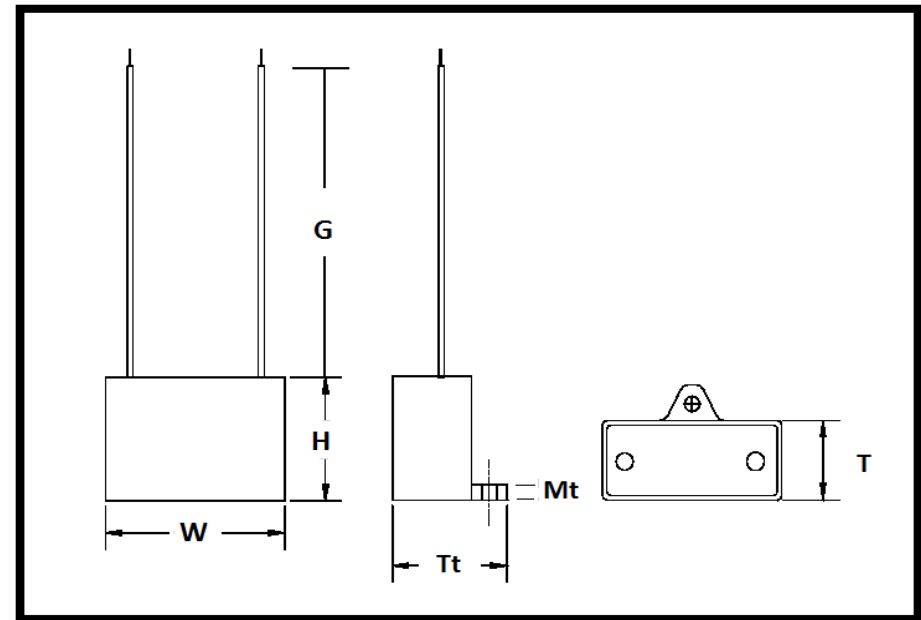
MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.88	0.03
Thickness (T)	0.86	0.03
Height (H)	1.32	0.03
Total Thickness (Tt)	1.31	0.06
Wire Length (G)	4.13	0.38
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mounting Tab Thickness (Mt)		

Dimensions in inches

Stamping	ADP
	10 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	6100-9148
	RU, cRU RoHs

UL Recognized Component

Approval: J.D. Aldana
 Date: December 5, 2017

Mounting Hole must be 0.17 with .01 tolerance
Wire leads MUST be 20 GA