


Part Number	ADP250M205J		Revision
Customer P/N			Revision
Capacitance	2	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.27	0.03
Thickness (T)	0.50	0.03
Height (H)	0.90	0.03
Total Thickness (Tt)	0.90	0.06
Wire Length (G)	3.50	0.50
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Black	
Mounting Tab Thickness (Mt)		

Dimensions in inches

Stamping	ADP
	2 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	
	RU, cRU RoHs

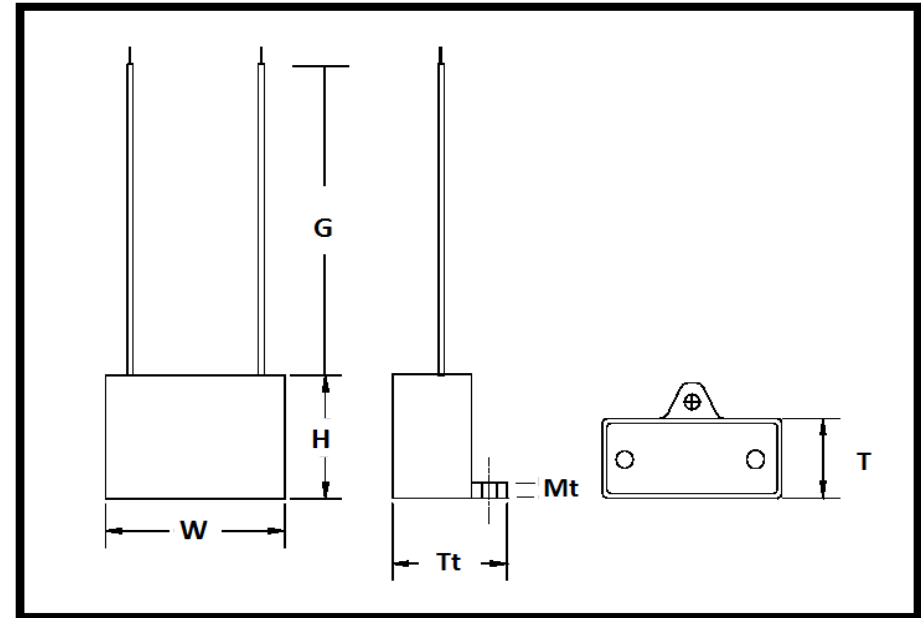

UL Recognized Component

Approval: J.D. Aldana
 Date: February 2, 2000

