

Part Number	<b>ADP250M505J-M1</b>		Revision
Customer P/N	<b>CF505U37LL</b>		Revision
Capacitance	<b>5</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>250</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	<b>1.45</b>	<b>0.03</b>
Thickness (T)	<b>0.53</b>	<b>0.03</b>
Height (H)	<b>0.94</b>	<b>0.03</b>
Total Thickness (Tt)	<b>0.96</b>	<b>0.06</b>
Wire Length (G)	<b>3.50</b>	<b>0.50</b>
Wire Gauge (Gw)	<b>20</b>	<b>AWG</b>
Wire Color (Cw)	<b>Black</b>	
Mountng Tab Thickness (Mt)	<b>0.20</b>	<b>0.04</b>

*Dimensions in inches*

Stamping	<p><b>Logo/ADP</b>  <b>5 uF 5% 250 VAC</b>  <b>-25 - +85 C.</b>  <b>50 - 60 Hz.</b>  <b>Motor Cap</b>  <b>CBB61</b>  <b>RU, cRU RoHs</b></p>
----------	--

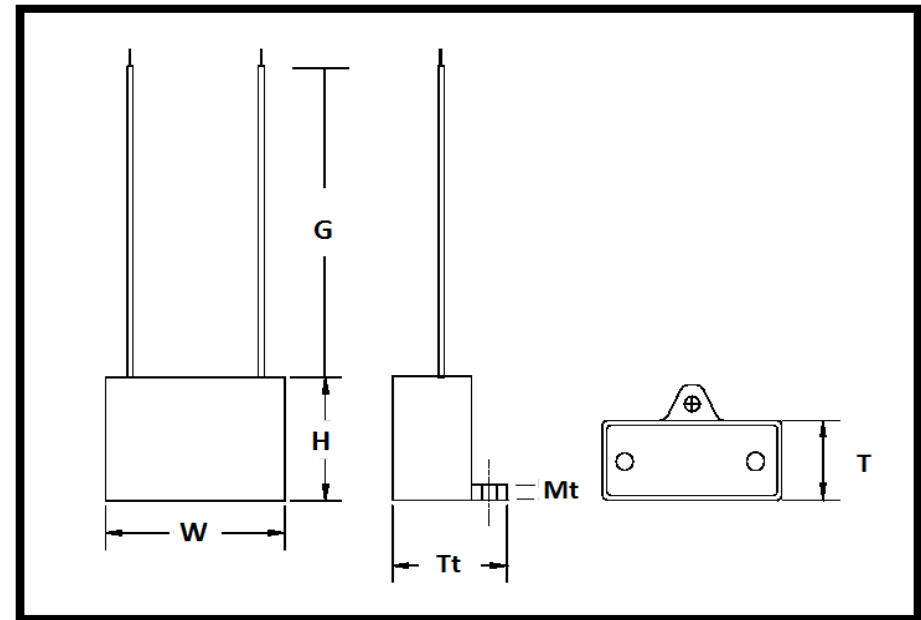

UL Recognized Component

Approval: J.D. Aldana  
 Date: July 21, 2011

