

Part Number	ADP250M505J	Revision	B
Customer P/N	494-29449 / 494-01015	Revision	B
Capacitance	5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


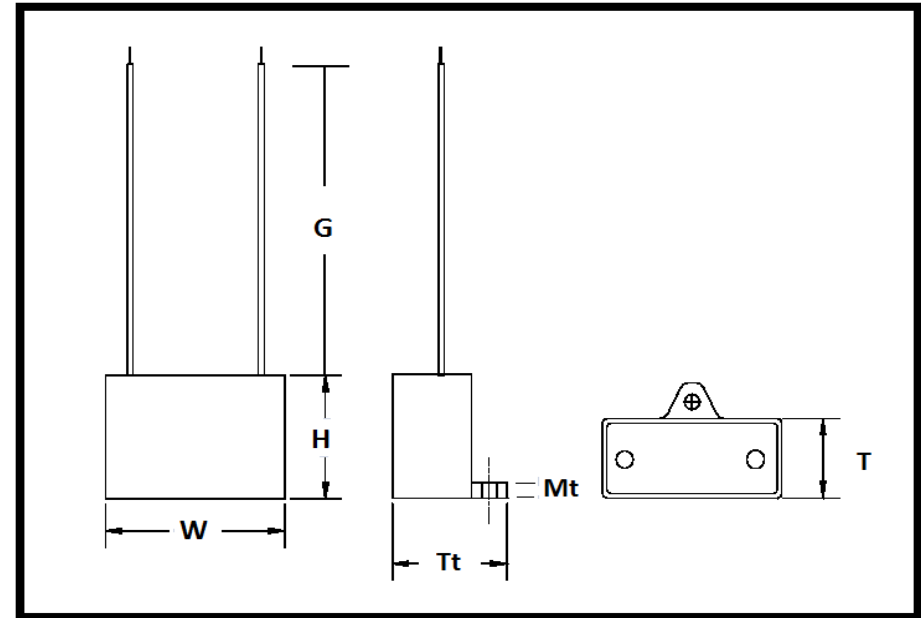
Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.53	0.03
Thickness (T)	0.77	0.03
Height (H)	1.13	0.03
Total Thickness (Tt)	1.14	0.06
Wire Length (G)	3.50	0.50
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Black	
Mounting Tab Thickness (Mt)	0.20	0.02

Dimensions in inches

Stamping

ADP
5 uF 5% 250 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap
494-29449 / 494-01015
RU, cRU RoHs

UL Recognized Component

Approval: J.D. Aldana
 Date: May 1, 2001

