

Part Number	ADP250N1255J-M1		Revision
Customer P/N	195-ACEP-017		Revision
Capacitance	12.5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.002	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.04
Thickness (T)	0.67	0.04
Height (H)	1.22	0.04
Total Thickness (Tt)	1.13	0.06
Wire Length (G)	6.69	0.20
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.15	0.02


Dimensions in inches

Stamping

ADP
12.5 uF 5% 250 VAC
-40 - +85 C.
50 - 60 Hz.
Motor Cap - CBB61



RU cRU RoHs Date Code

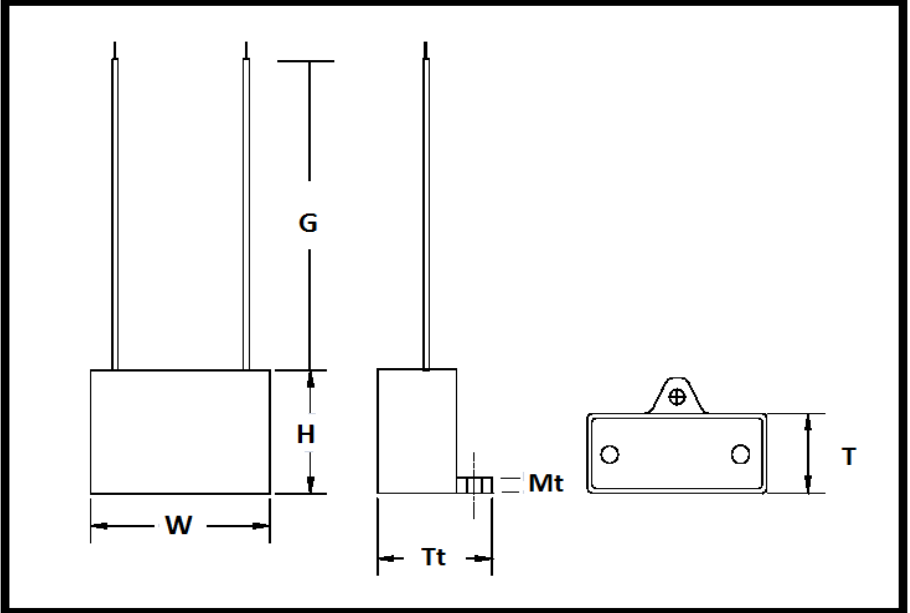

UL Recognized Component

Approval: J.D. Aldana
 Date: June 20, 2016

Wire Specification: UL Style 3321, 150 °C, 18 AWG, Black Wire
Epoxy resin filled UL94-V0 black plastic case
Class 'C' operation
Wire stripped at the end: 0.25" ± 0.04"