

Part Number	<b>ADP250N156J</b>	Revision	6
Customer P/N	<b>6100-6050</b>	Revision	6
Capacitance	<b>15</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>250</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.


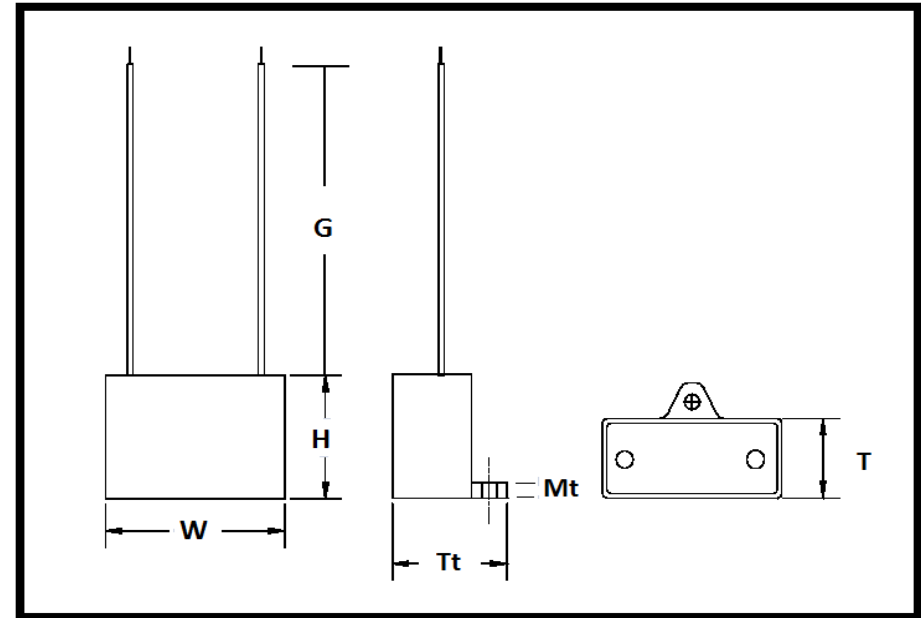
**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	<b>2.04</b>	<b>max.</b>
Thickness (T)	<b>0.87</b>	<b>max.</b>
Height (H)	<b>1.38</b>	<b>max.</b>
Total Thickness (Tt)	<b>1.29</b>	<b>max.</b>
Wire Length (G)	<b>7.88</b>	<b>0.38</b>
Wire Gauge (Gw)	<b>18</b>	<b>AWG</b>
Wire Color (Cw)	<b>Black</b>	
Mounting Tab Thickness (Mt)		

*Dimensions in inches*

Stamping

**ADP**  
**15 uF 5% 250 VAC**  
**-25 - +85 C.**  
**50 - 60 Hz.**  
**Motor Cap**  
**6100-6050**  
**RU, cRU RoHs**

UL Recognized Component

Approval: J.D. Aldana  
 Date: August 4, 2006

