

Part Number	ADP250S405JN		Revision	
Customer P/N			Revision	
Capacitance	4	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	PCB-Mount Pins			
Operating Temperature		-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.		

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)


www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.49	0.03
Thickness (T)	0.67	0.03
Height (H)	1.06	0.03
Lead Spacing	NO mtg ear	
Wire Length (G)	1.00	min.
Wire Thickness	1mm	AWG

Dimensions in inches

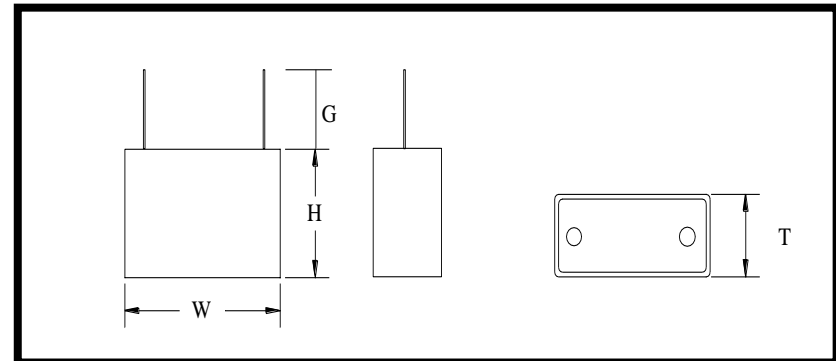

Stamping	ADP
	4 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	CBB61 RoHs
	RU, cRU RoHs

UL Recognized Component

Engineer J.D. Aldana
Date December 18, 2003