

Part Number	ADP250S824JN	Revision	
Customer P/N		Revision	
Capacitance	0.82	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	PCB-Mount Pins		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)


[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.26	0.03
Thickness (T)	0.43	0.03
Height (H)	0.83	0.03
Lead Spacing	NO mtg ear	
Wire Length (G)	1.00	min.
Wire Thickness	1mm	AWG

*Dimensions in inches*

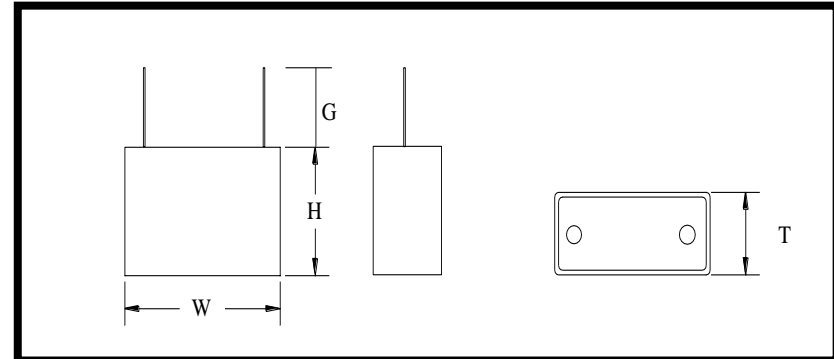

	Stamping
	ADP
	0.82 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	RU, cRU RoHs

UL Recognized Component

Engineer J.D. Aldana  
Date August 23, 2000