


Part Number	ADP250Z605J		Revision
Customer P/N			Revision
Capacitance	6	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads 18 AWG X 10"		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.54	0.03
Thickness (T)	0.67	0.03
Height (H)	1.04	0.03
Total Thickness (Tt)	1.05	0.06
Wire Length (G)	10.00	0.05
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.15	0.02

Dimensions in inches

Stamping	ADP
	6 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	
	RU, cRU RoHs

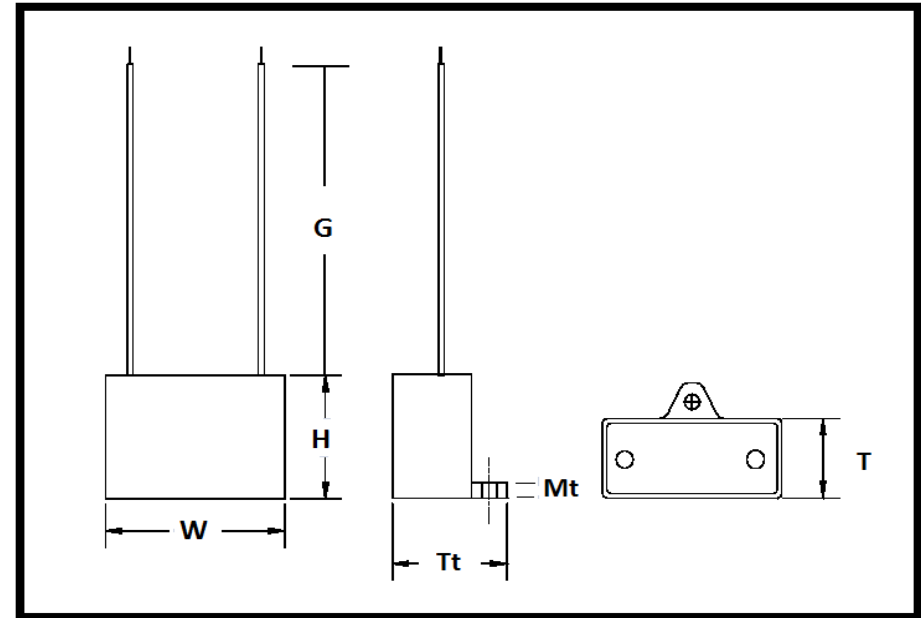

UL Recognized Component

Approval: J.D. Aldana
 Date October 28, 2010

Note: 10" wire leads and Mounting Hole must be 0.17 with .01 tolerance