


Part Number	ADP330A405J	Revision	
Customer P/N		Revision	
Capacitance	4	uF.	Tolerance 5%
Voltage	330	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.45	0.03
Thickness (T)	0.87	0.03
Height (H)	1.30	0.03
Total Thickness (Tt)	1.27	0.06
Mounting Hole		

Dimensions in inches

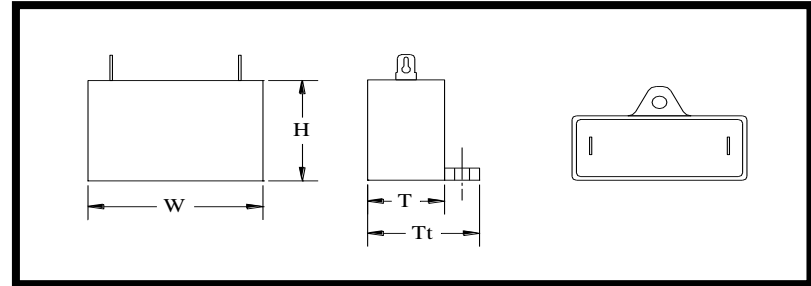

	Stamping
	ADP
	4 uF 5% 330 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	6100-9139
	RU, cRU RoHs

UL Approved Capacitor



Approval: J. D. Aldana
 Date January 31, 2000