

Part Number	ADP330H405J		Revision	12
Customer P/N	6100-9071		Revision	
Capacitance	4	uF.	Tolerance	5%
Voltage	330	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	


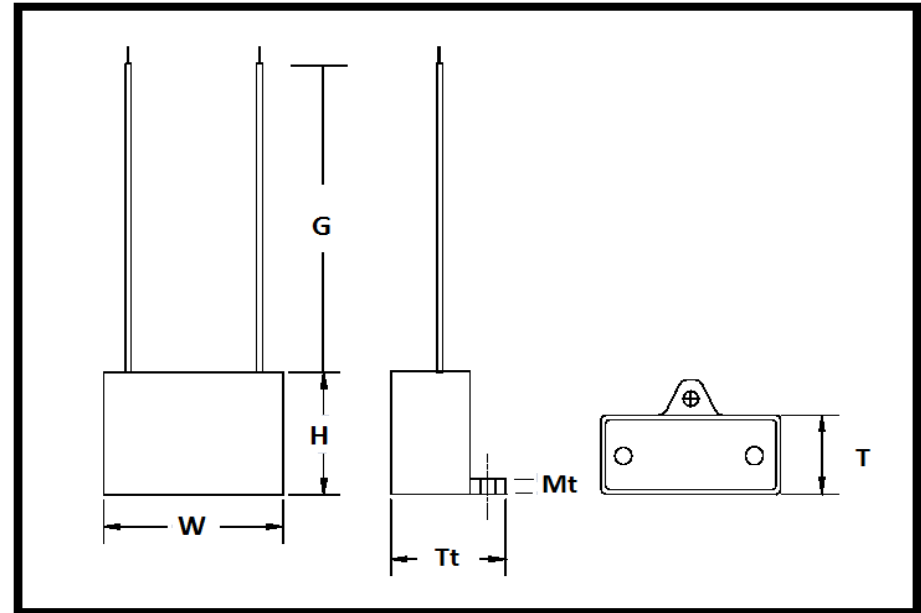
# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	0.71	0.03
Height (H)	1.22	0.06
Total Thickness (Tt)	1.11	0.09
Wire Length (G)	4.30	0.60
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Red	
Mountng Tab Thickness (Mt)		

*Dimensions in inches*

Stamping	ADP
	4 uF 5% 330 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap
	6100-9071
	RU, cRU RoHs

UL Recognized Component

Approval: J.D. Aldana  
 Date: August 4, 2011

