


Part Number	ADP370A305J-M1	Revision	
Customer P/N	21739	Revision	
Capacitance	3	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	105 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.46	0.03
Thickness (T)	0.87	0.03
Height (H)	1.34	0.03
Total Thickness (Tt)	1.27	0.03
Mounting Hole	0.17	0.01

Dimensions in inches

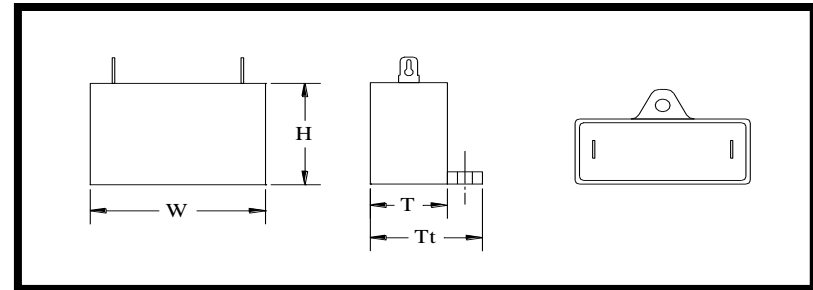

Stamping

CBB61 Series
ADP370A305J-M1
 3.0 uf., +/-5%
 370 VAC 50/60 Hz.
 -25 - +105 C.
 105 C Max Case Temp.
 RU, cRU, RoHS



UL Approved Capacitor



Approval: J.D. Aldana
 Date: April 22, 2008