


Part Number	ADP370A505J-M1		Revision	A
Customer P/N			Revision	A
Capacitance	5	uF.	Tolerance	5%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Single .187" X .02" Quick Connect Terminals			
Operating Temperature	-25	105 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.46	0.03
Thickness (T)	0.87	0.03
Height (H)	1.34	0.03
Total Thickness (Tt)	1.27	0.03
Mounting Hole	0.17	0.01

Dimensions in inches

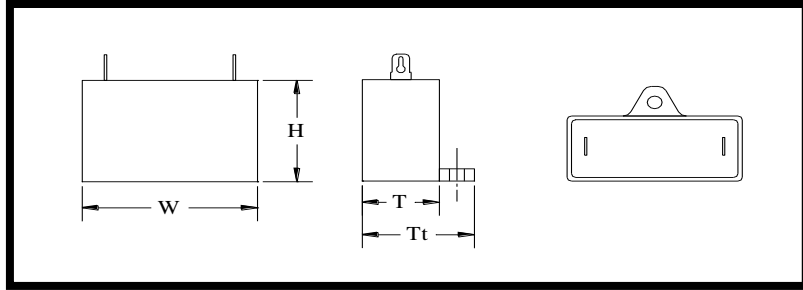

Stamping

CBB61 Series
 ADP370A505J-M1
 5.0 uF., +/-5%
 370 VAC 50/60 Hz.
 -25 - +105 C.
 105 C Max Case Temp.
 RU, cRU, RoHS



UL Approved Capacitor



Approval: J.D. Aldana
 Date: April 22, 2008