


Part Number	ADP370A505JP	Revision
Customer P/N	SE-00031-007	Revision
Capacitance	5 uF.	Tolerance 5%
Voltage	370 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Single .187" X .02" Quick Connect Terminals	
Operating Temperature	-25	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.
Insulation Resistance		MegOhms minimum

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.85	max.
Thickness (T)	0.71	max.
Height (H)	1.38	max.
Bracket Height (Hb)	1.38	0.06
Bracket Spacing (Z)	0.69	ref.
Bracket Width (Wb)	0.47	

Dimensions in inches

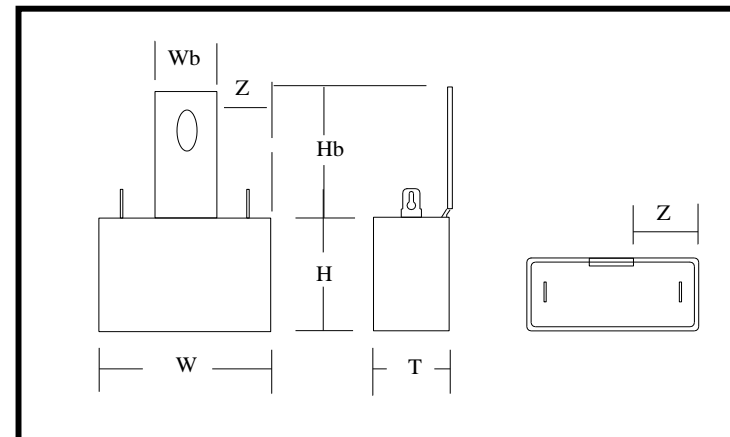

Stamping

ADP370A505JP
 5 uF 5% 370 VAC
 -25 - +85 C.
 50 - 60 Hz.
 Motor Cap
 SE-00031-007
 RU, cRU, RoHs



Terminals to be oriented along the "T" dimensions.
 Mounting Hole: 0.19 X 0.22 ref.

Engineer J. D. Aldana
 Date September 30, 2016