


Part Number	ADP370F805J-M1		Revision
Customer P/N	ETP-37H080UF		Revision
Capacitance	8	uF.	Tolerance -5% / +10%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	2.28	0.03
Thickness (T)	0.91	0.03
Height (H)	1.48	0.03
Total Thickness (Tt)	1.37	0.06
Mounting Hole	0.27	ref.

*Dimensions in inches*

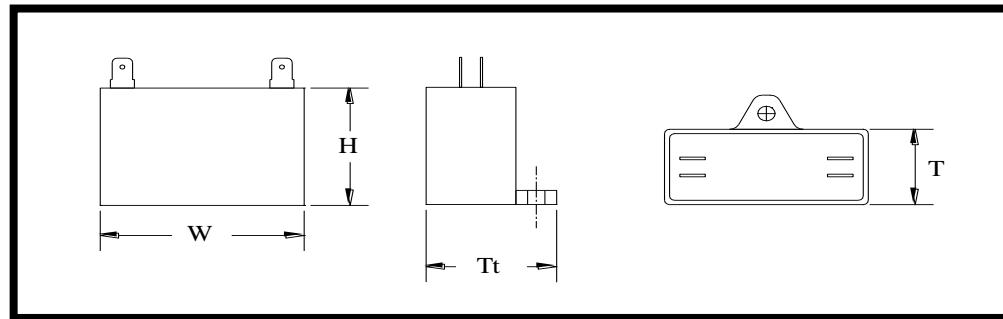

UL Approved Capacitor

	ETP-37H080UF
	8 uF -5/+10% 370 VAC
	-25 - +85 C. (HPF)
	50 - 60 Hz.
	C22.2 No.190 1 Phase
	0.34 / 0.41 Kvar
cRU RU TUV	



Approval: J.D. Aldana  
 Date: October 6, 2016