

Part Number	ADP370M755J		Revision
Customer P/N			Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.01	0.03
Thickness (T)	1.18	0.03
Height (H)	1.57	0.03
Total Thickness (Tt)	1.58	0.06
Wire Length (G)	3.50	0.50
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Black	
Mounting Tab Thickness (Mt)	0.15	0.02


Dimensions in inches

Stamping

ADP
7.5 uF 5% 370 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap



RU, cRU, RoHS

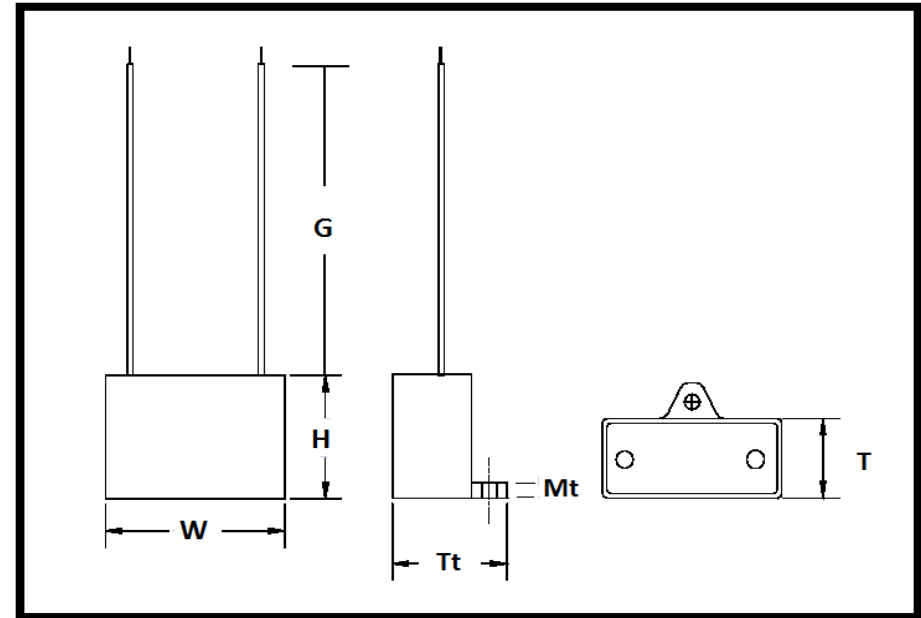

UL Recognized Component

Approval: J.D. Aldana
 Date: February 2, 2000

