

Part Number	<b>ADP370Z754J</b>		Revision
Customer P/N			Revision
Capacitance	<b>0.75</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>370</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	<b>1.25</b>	<b>0.03</b>
Thickness (T)	<b>0.43</b>	<b>0.03</b>
Height (H)	<b>0.83</b>	<b>0.03</b>
Total Thickness (Tt)		<b>0.06</b>
Wire Length (G)	<b>18.00</b>	<b>min.</b>
Wire Gauge (Gw)	<b>18</b>	<b>AWG</b>
Wire Color (Cw)	<b>Black</b>	
Mountng Tab Thickness (Mt)		

*Dimensions in inches*

Stamping	<b>Logo / ADP370Z754</b>
	<b>0.75 uF 5% 370 VAC</b>
	<b>-25 - +85 C.</b>
	<b>50 - 60 Hz.</b>
	<b>Motor Cap-CBB6-1</b>
	<b>RU, cRU RoHs</b>

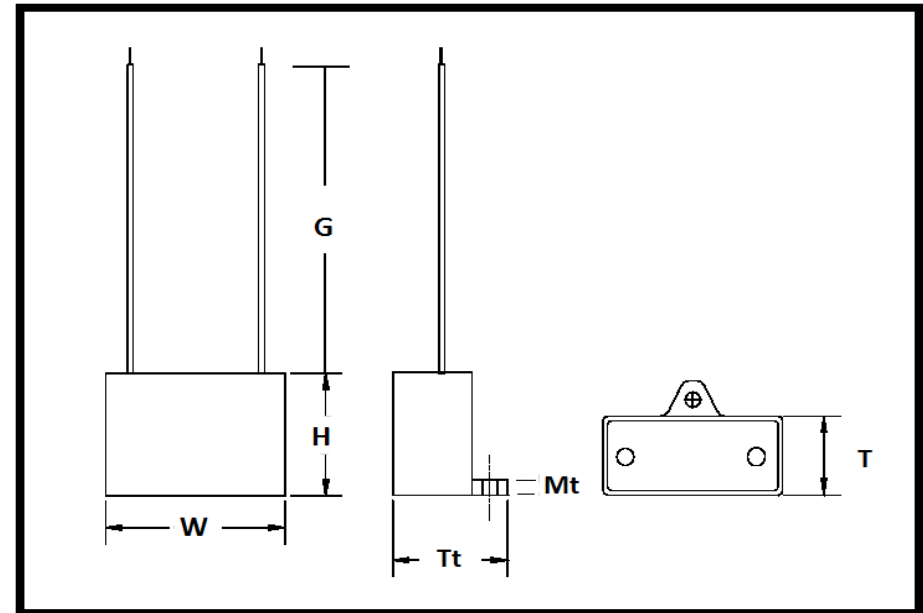

UL Recognized Component

Approval: J.D. Aldana  
 Date: January 16, 2020

**Wire Length: 18" , Strip Leads 0.38"**