


Part Number	ADP440F205JL		Revision
Customer P/N			Revision
Capacitance	2	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	
Insulation Resistance	500	MegOhms minimum	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.46	0.03
Thickness (T)	0.71	0.03
Height (H)	1.18	0.03
Bracket Height (Hb)	0.50	0.03
Bracket Spacing (Z)	0.50	0.03
Bracket Width (Wb)	0.47	±0.01

Dimensions in inches

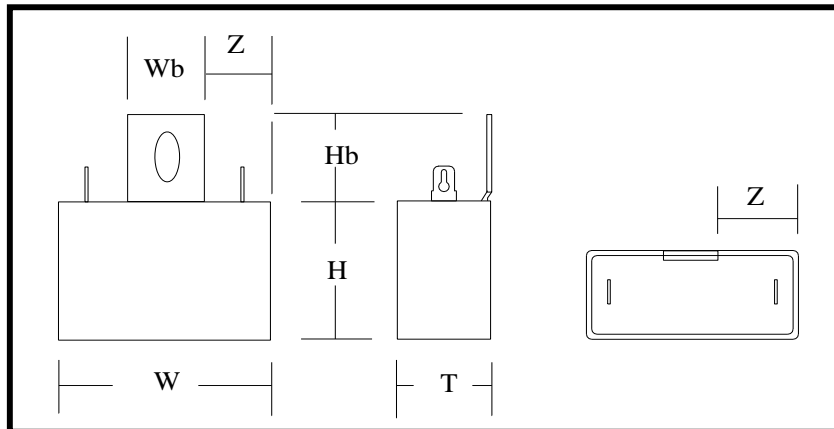

Stamping

ADP
 2 uF 5% 440 VAC
 -25 - +85 C.
 50 - 60 Hz.
 Motor Cap



RU, cRU, RoHS

Approval: J. D. Aldana
 Date August 6, 2004