


Part Number	ADP440F505JL		Revision
Customer P/N			Revision
Capacitance	5	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	
Insulation Resistance	200	MegOhms minimum	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Width (W)	1.85	0.03
Thickness (T)	0.86	0.03
Height (H)	1.33	0.03
Bracket Height (Hb)	0.51	0.03
Bracket Spacing (Z)	0.70	0.03
Bracket Width (Wb)	0.47

Dimensions in inches

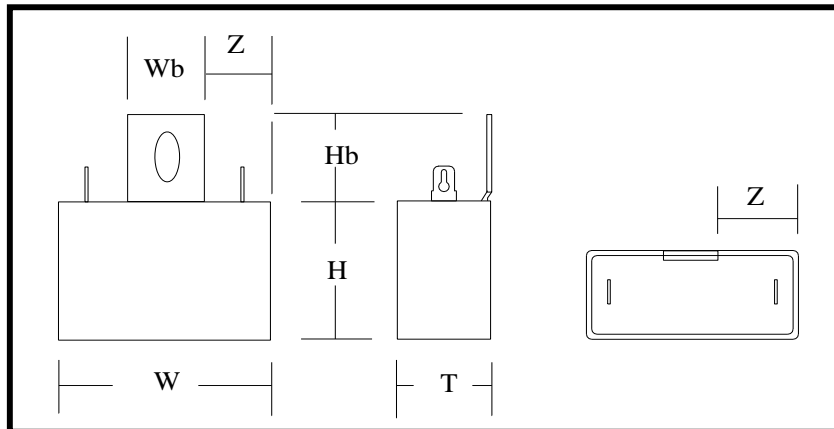

Stamping

ADP
2 uF 5% 440 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap



RU, cRU, RoHS

Approval: J. D. Aldana
Date July 9, 2015