

Part Number	ADP440M205J		Revision
Customer P/N			Revision
Capacitance	2	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.50	0.03
Thickness (T)	0.57	0.03
Height (H)	1.06	0.03
Total Thickness (Tt)	1.01	0.06
Wire Length (G)	3.50	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping

Logo/ADP
2 uF 5% 440 VAC
-25 - +85 C.
50 - 60 Hz.
Motor Cap
CBB6-1 RoHS
RU cRU VDE

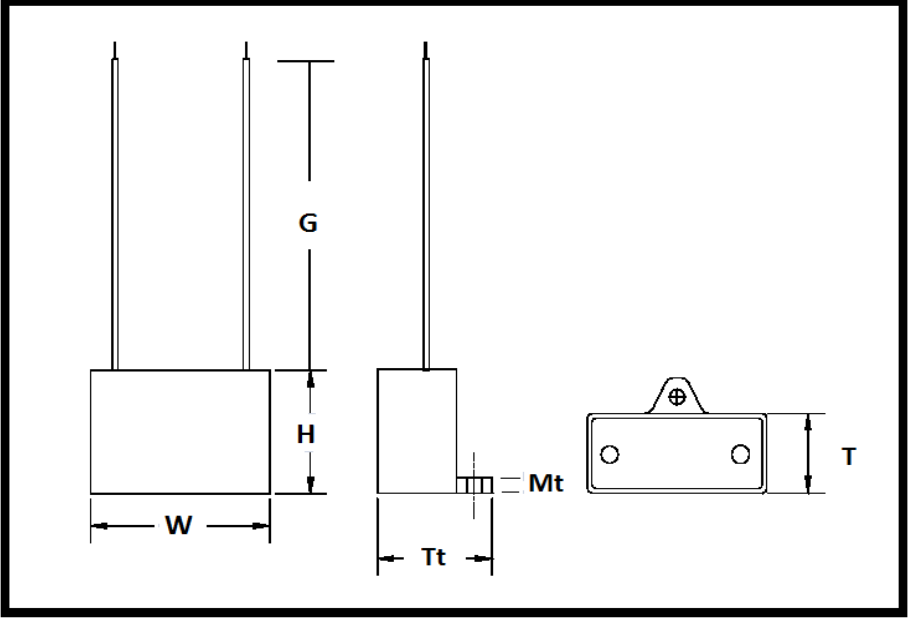

UL Recognized Component

Approval: J.D. Aldana
 Date: October 12, 2012

