

Part Number	ADP440M605J		Revision
Customer P/N			Revision
Capacitance	6	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.04
Thickness (T)	0.81	0.04
Height (H)	1.38	0.04
Total Thickness (Tt)	1.22	0.06
Wire Length (G)	4.50	0.50
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.51	0.02


Dimensions in inches

Stamping

Logo/ADP
6 uF 5% 440 VAC
-40 - +85 C.
50 - 60 Hz.
Motor Cap CBB61



RU, cRU, RoHS

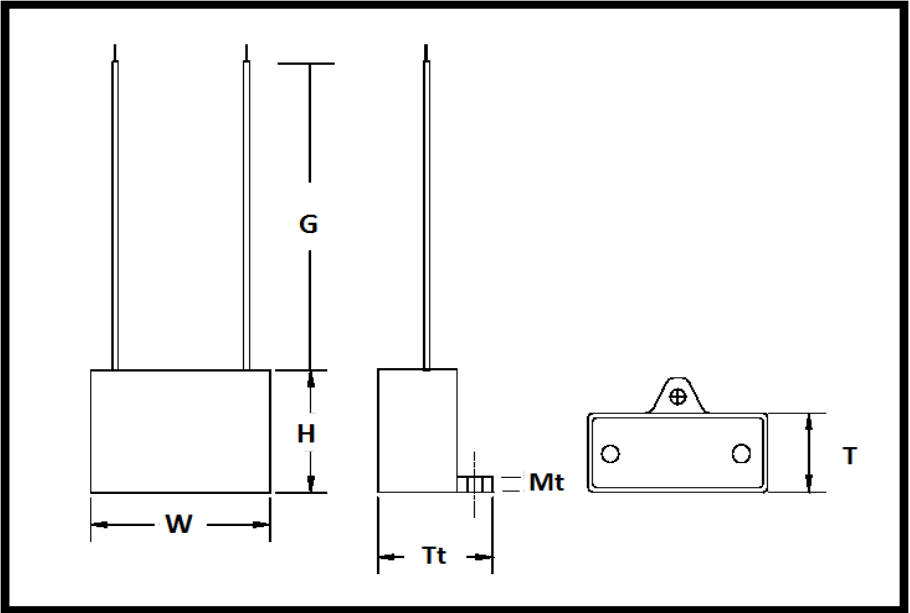

UL Recognized Component

Approval: *J.D. Aldana*
 Date November 8, 2021

RU Approved Wire Leads Rated at 105°C