

<b>Part Number</b>	<b>ADPS250A106JN</b>	<b>Revision</b>	<b>3</b>
<b>Customer P/N</b>	<b>197.0987</b>	<b>Revision</b>	<b>3</b>
<b>Capacitance</b>	<b>10</b>	<b>uF.</b>	<b>Tolerance 5%</b>
<b>Voltage</b>	<b>250</b>	<b>VAC</b>	
<b>Dielectric</b>	<b>Metallized Polypropylene</b>		
<b>Terminal Type</b>	<b>Single .187" X .02" Quick Connect Terminals</b>		
<b>Operating Temperature</b>	<b>-25</b>	<b>85 °C.</b>	
<b>Dissipation Factor</b>	<b>0.001</b>	<b>maximum</b>	<b>@ 60 Hz.</b>


# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
**335 Beinoris Drive**  
**Wood Dale, Illinois 60191**  
**773-774-6666 (Phone) | 773-774-6690 (Fax)**  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
<b>Width (W)</b>	<b>1.49</b>	<b>0.03</b>
<b>Thickness (T)</b>	<b>0.86</b>	<b>0.03</b>
<b>Height (H)</b>	<b>1.26</b>	<b>0.03</b>
<b>Total Thickness (Tt)</b>	<b>NO mtg ear</b>	
<b>Lead Spacing (Ls)</b>	<b>0.98</b>	<b>0.02</b>
<b>Terminal Width</b>	<b>0.187</b>	<b>0.24 (w/ Shoulder)</b>

*Dimensions in inches*

**UL Approved Capacitor**

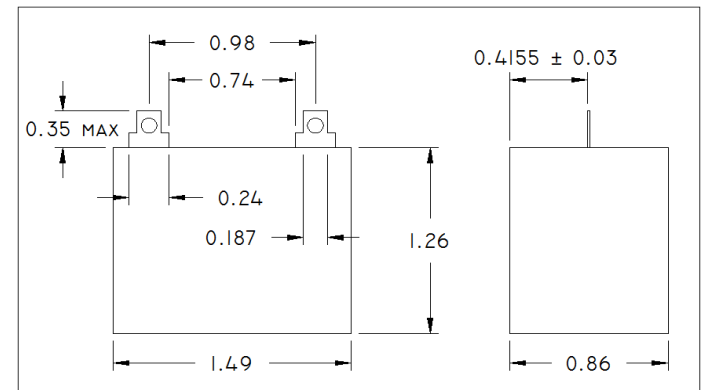

## Stamping



**Logo/ADPS**  
**10 uF 5% 250 VAC**  
**50/60 Hz. +85 C.**  
**P2 - 10,000 AFC**  
**Motor Cap - CBB6-1**  
**RU, cRU, RoHS**  
**Date Code**

## REVISION LOG:

Rev.1 (12/11/12) - Original Draft  
 Rev.2 (10/07/14) - New Terminal  
 --> Replaced 0.25" (0.31" with shoulder) terminal with 0.187" (0.24" with shoulder) terminal  
 Rev.3 (10/09/14) - Adjusted Terminal Height  
 --> Reduced terminal height from 0.39" to 0.35"

**Protected Capacitor: Segmented Metallized Polypropylene Film**  
**Terminals Must Be Straight and Centered.**

Engineer JD Aldana  
 Date October 9, 2014