


Part Number	ADPS250A106J		Revision	
Customer P/N	39018-8		Revision	
Capacitance	10	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Safety Metallized Polypropylene			
Terminal Type	Single .187" X .02" Quick Connect Terminals			
Operating Temperature	-25		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	
Insulation Resistance	100	MegOhms	minimum	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.49	0.04
Thickness (T)	0.75	0.04
Height (H)	1.22	0.04
Total Thickness (Tt)	1.24	0.06
Mounting Hole	0.18	max.

Dimensions in inches

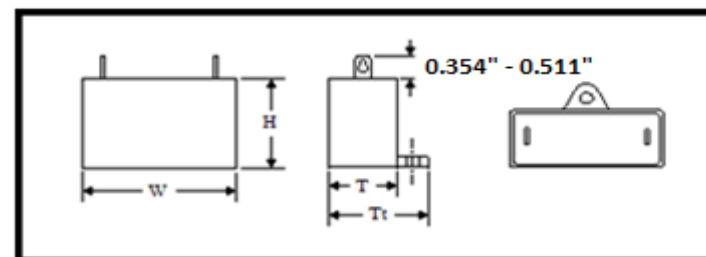

Stamping:



ADPS / CBB6-1
Motor Cap - CBB6-1
10 uF 5% 250 VAC
50/60 Hz. +85 C.
P2 - 10,000 AFC
RU, cRU, RoHS
Date Code



UL-810 Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film
Terminal Height MUST NOT go below 0.35"

Engineer J.D. Aldana
Date 3/23/2018

RoHS mark on bottom of case:

