


Part Number	ADPS250A205J-M2		Revision
Customer P/N	39018-1		Revision
Capacitance	2	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.
Insulation Resistance	500	MegOhms	minimum

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.42	0.03
Thickness (T)	0.45	0.03
Height (H)	0.87	0.03
Total Thickness (Tt)	0.88	0.06
Mounting Hole	0.19	0.02

*Dimensions in inches*

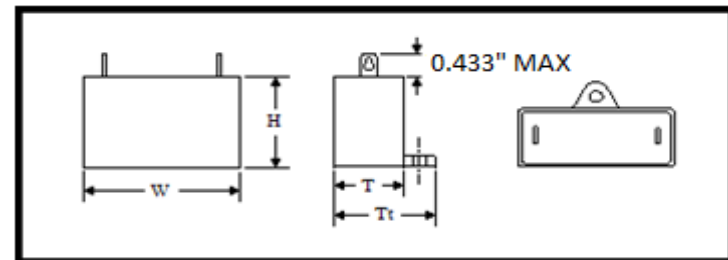

<b>Stamping:</b>	
Logo	ADPS / CBB6-1
	2 uF 5% 250 VAC
	50/60 Hz -25 +85 C
	P2 - Protected
	10,000 AFC Date Code
	RU, cRU, RoHS
	Made in China



UL-810 Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Engineer *J.D. Aldana*  
 Date 4/29/2010

RoHS mark on bottom of case:

