


Part Number	ADPS250F755J		Revision
Customer P/N			Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.49	0.03
Thickness (T)	0.67	0.03
Height (H)	1.10	0.03
Total Thickness (Tt)	1.12	0.06
Mounting Hole	0.18	0.02

Dimensions in inches

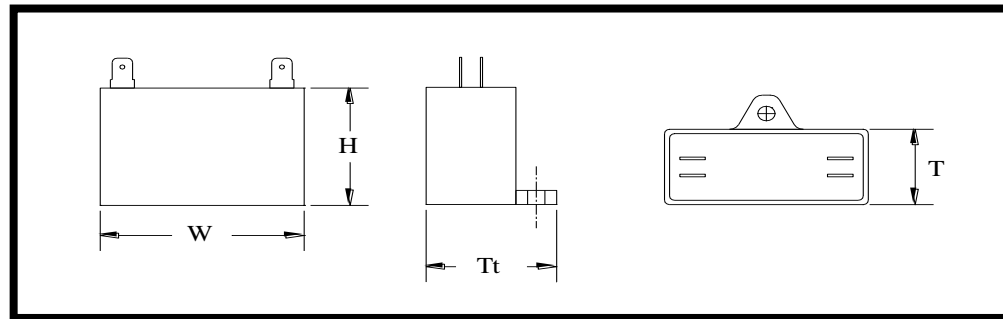

UL Approved Capacitor

	Stamping
	Logo/ADPS
	7.5 uF 5% 250 VAC
	50/60 Hz. +85 C.
	P2 - 10,000 AFC
	Motor Cap - CBB6-1
RU, cRU, RoHS	
Date Code	

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval: J.D. Aldana
 Date: October 30, 2012