

Part Number	ADPS330M805JL		Revision	A
Customer P/N	195-108-8100		Revision	A
Capacitance	8	uF.	Tolerance	5%
Voltage	330	VAC		
Dielectric	Safety Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-40	85 °C.		
Dissipation Factor	0.002	maximum	@ 60 Hz.	

MOTOR


Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.04
Thickness (T)	0.67	0.04
Height (H)	1.22	0.04
Total Thickness (Tt)	0.80	0.05
Wire Length (G)	4.00	0.50
Wire Gauge (Gw)	20.00	AWG
Wire Color (Cw)	Black	
Bracket Height (Hb)	0.50	0.03
Bracket Width (Wb)	0.47	0.03

Dimensions in inches

Stamping	Logo/ADPS
	8 uF 5% 330 VAC
	50/60 Hz -25 - +85 C
	P2 - 10,000 AFC
	Motor Cap - CBB61
	195-108-8100
	RU cRU RoHS Date Code

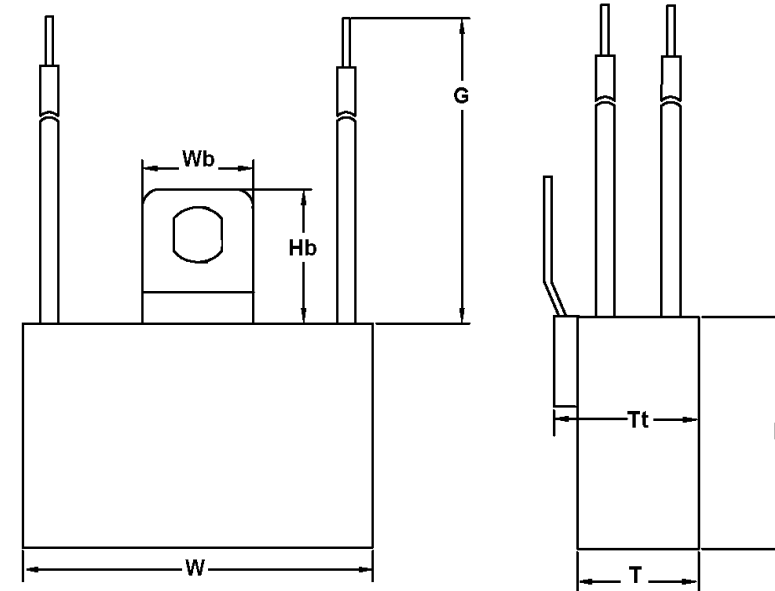

UL Recognized Component

Protected Capacitor: Segmented Metallized Polypropylene Film

Engineer J.D. Aldana
Date _____