

Part Number	ADPS330M805J		Revision
Customer P/N	195-108-8000		Revision
Capacitance	8	uF.	Tolerance 5%
Voltage	330	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.05
Thickness (T)	0.98	0.05
Height (H)	1.38	0.05
Total Thickness (Tt)	1.41	0.06
Wire Length (G)	4.00	0.50
Wire Gauge (Gw)	20	AWG
Wire Color (Cw)	Black	
Mountng Tab Thickness (Mt)	0.20	0.04

Dimensions in inches

Stamping	<p>Logo/ADPS 8 uF 5% 330 VAC 50/60 Hz -40 - +85 C P2 - 10,000 AFC Motor Cap - CBB61 195-108-8000 RU cRU RoHs Date Code</p>
----------	---

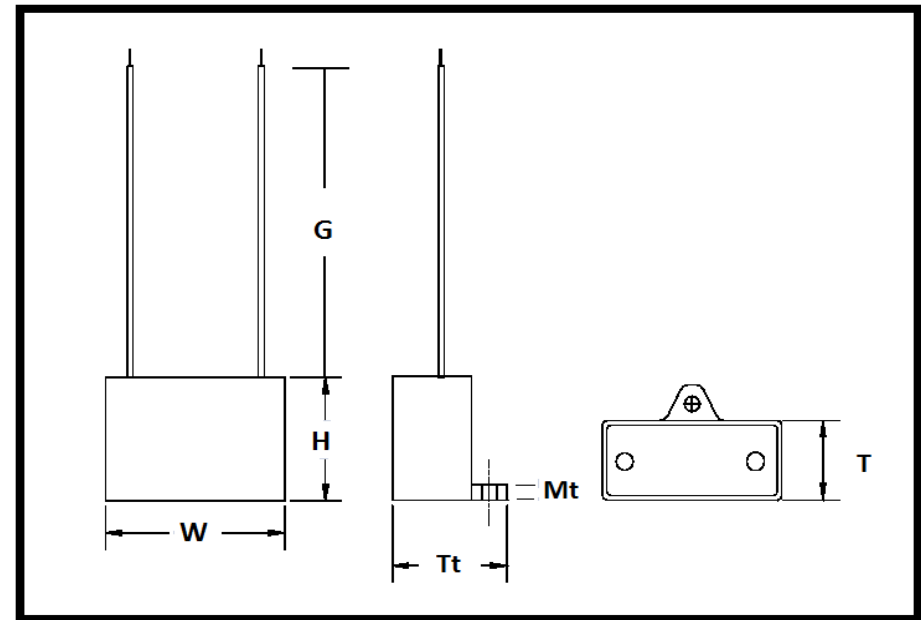

UL Recognized Component

Approval: J.D. Aldana
 Date: June 13, 2011

Protected Capacitor: Segmented Metallized Polypropylene Film
Mounting Hole Opening 0.17"