


Part Number	ADPS370A305J		Revision
Customer P/N			Revision
Capacitance	3	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .187" X .02" Quick Connect Terminals		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.50	0.04
Thickness (T)	0.67	0.04
Height (H)	1.10	0.04
Total Thickness (Tt)	1.18	0.02
Mounting Hole	0.17	0.01

Dimensions in inches

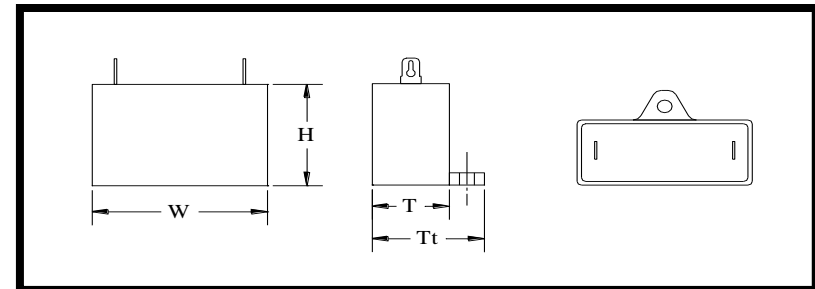

	Stamping
	ADPS
	3 uF 5% 370 VAC
	50/60 Hz 40/085/21
	P2 - 10,000 AFC
	Motor Cap - CBB61
	RU (UL810) cRU RoHs
	Date Code

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film
 UL 810 Approval

Approval: J.D. Aldana
 Date: June 5, 2014