


Part Number	ADPS370F405J	Revision
Customer P/N	EPBS-37M040UF	Revision
Capacitance	4 uF.	Tolerance -5% / +10%
Voltage	370 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Dual .250" X .03" Quick Connect Terminals	
Operating Temperature	-25 85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.50	0.03
Thickness (T)	0.96	0.03
Height (H)	1.39	0.03
Total Thickness (Tt)	1.38	0.06
Mounting Hole	0.16	ref.

*Dimensions in inches*

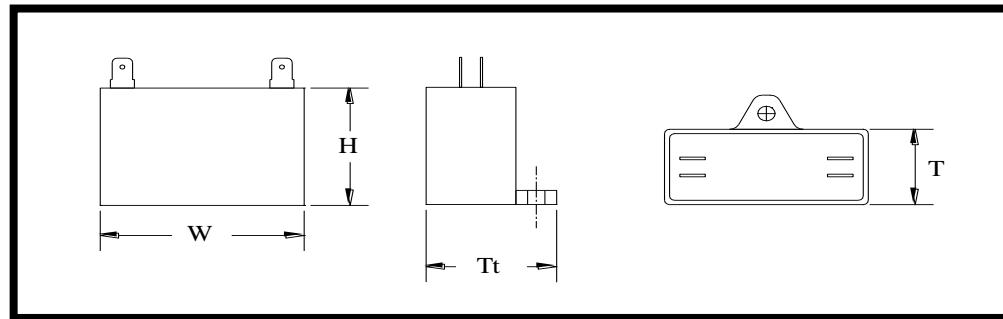

UL Approved Capacitor

	EPBS-37M040UF SH P1
	4 uF -5/+10% 370 VAC
	50 - 60 Hz. -25 - +85 C. (HPF)
	10000 AFC
	C22.2 No.190 1 Phase
	0.17 / 0.21 Kvar
	cRU RU TUV



Approval: J.D. Aldana  
 Date: October 6, 2016