


Part Number	ADPS370F805J	Revision
Customer P/N	EPBS-37M080UF	Revision
Capacitance	8 uF.	Tolerance -5% / +10%
Voltage	370 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Dual .250" X .03" Quick Connect Terminals	
Operating Temperature	-25 85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.28	0.03
Thickness (T)	1.31	0.03
Height (H)	1.76	0.03
Total Thickness (Tt)	1.75	0.06
Mounting Hole	0.16	ref.

Dimensions in inches

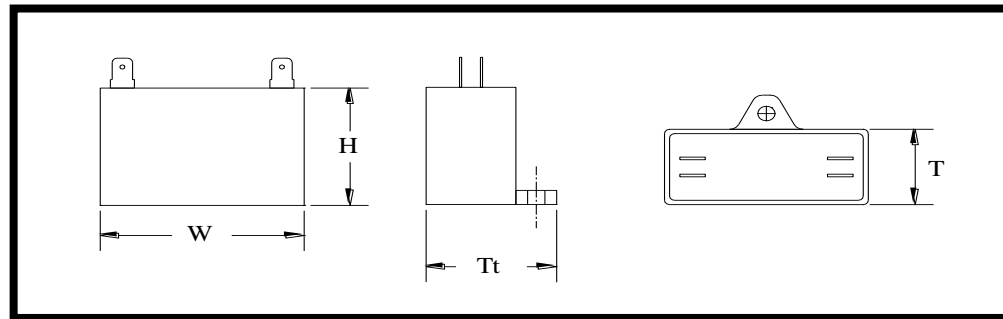

UL Approved Capacitor

	EPBS-37M080UF SH P1
	8 uF -5/+10% 370 VAC
	50 - 60 Hz. -25 - +85 C. (HPF)
	10000 AFC
	C22.2 No.190 1 Phase
	0.34 / 0.41 Kvar
	cRU RU TUV



Approval: J.D. Aldana
 Date: October 6, 2016