


Part Number	ADPS400A305J	Revision
Customer P/N	6100-4136	Revision
Capacitance	3 uF.	Tolerance 5%
Voltage	400 VAC	
Dielectric	Safety Metallized Polypropylene	
Terminal Type	Single .187" X .02" Quick Connect Terminals	
Operating Temperature	-25	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.46	0.03
Thickness (T)	0.73	0.03
Height (H)	1.21	0.03
Total Thickness (Tt)	1.14	0.06
Mounting Hole		

Dimensions in inches

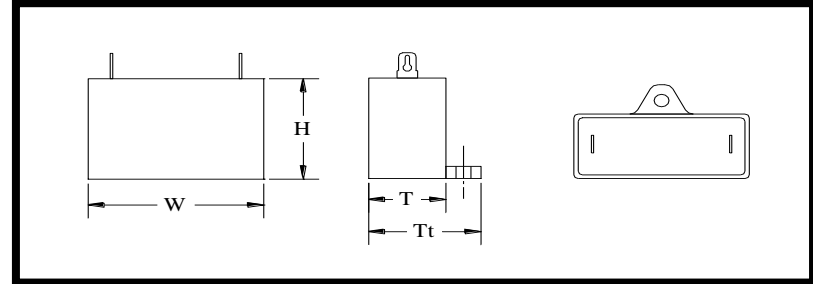

Stamping	SM400-30
	3 uF 5% 400 VAC
	50/60 Hz +85 C
	P2 - 10,000 AFC
	Motor Cap - CBB6-1
	6100-4136
	RU cRU RoHS



UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval: J.D. Aldana
 Date: March 8, 2007