


Part Number	ADPS440A205J		Revision	
Customer P/N			Revision	
Capacitance	2	uF.	Tolerance	5%
Voltage	440	VAC		
Dielectric	Safety Metallized Polypropylene			
Terminal Type	Single .187" X .02" Quick Connect Terminals			
Operating Temperature		-25	85	°C.
Dissipation Factor	0.001	maximum	@	60 Hz.
Insulation Resistance	500	MegOhms	minimum	

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.46	0.03
Thickness (T)	0.57	0.03
Height (H)	1.06	0.03
Total Thickness (Tt)	1.00	0.03
Mounting Hole	0.18	0.02

*Dimensions in inches*

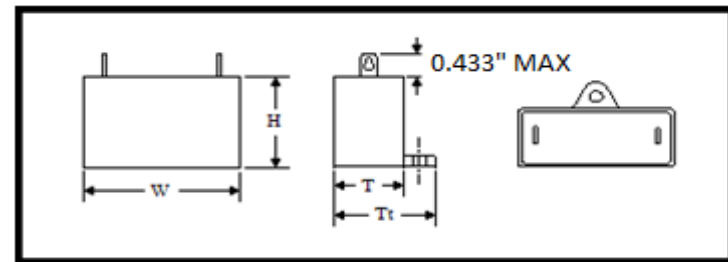

<b>Stamping:</b>	
Logo	ADPS / CBB61
	2.0 uF 5% 440 VAC
	50/60 Hz -25 +85 C
	P2 - Protected 10,000 AFC
	Motor Cap - CBB61
	UL, cUL, (UL810), RoHS
	Made in China



RoHS mark on bottom of case:



UL-810 Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Engineer J.D. Aldana  
 Date 6/23/2014