


Part Number	ADPS440E405J	Revision	
Customer P/N	156962	Revision	
Capacitance	4	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Safety Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.85	0.04
Thickness (T)	0.77	0.04
Height (H)	1.30	0.04
Total Thickness (Tt)	1.22	0.06
Mounting Hole	0.20	0.02

Dimensions in inches

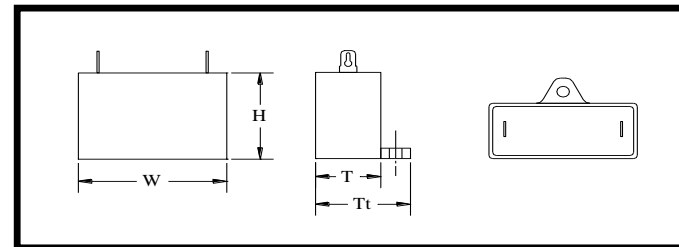

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Stamping	Logo/ADPS
	4 uF 5% 440 VAC
	50/60 Hz 40/085/21
	P2 - 10,000 AFC
	Motor Cap - CBB61
	RU, cRU, RoHS
	Date Code



Approval *J. D. Aldana*
Date **August 3, 2023**

G = RoHs compliant

NOTES:

- CAPACITOR SHALL BE CAPABLE OF WITHSTANDING THE FOLLOWING TEST WITHOUT PERMANENTLY SHORTING OR OPENING THE CIRCUIT BETWEEN TERMINALS OR CHANGING THE CAPACITANCE BY MORE THAN 3%.
 - 175% RATED AC VOLTAGE BETWEEN TERMINALS FOR ONE SECOND.
 - 200% RATED AC VOLTAGE PLUS 1,000 VOLTS BETWEEN EACH TERMINAL AND FOIL COVERING OUTSIDE OF CASE.
 - 135% RATED AC VOLTAGE BETWEEN TERMINALS FOR 120 HOURS AT ROOM TEMPERATURE.
 - 125% RATED AC VOLTAGE BETWEEN TERMINALS FOR 500 HOURS AT 80°C.
- THE CASE AND EXPOSED POTTING COMPOUND SHALL BE MADE OF RECOGNIZED SELF-EXTINGUISHING MATERIALS.
- OPERATING TEMPERATURE: -25°C TO +85°C.