


Part Number	ADPS450A405J	Revision
Customer P/N	620314318	Revision
Capacitance	4 uF.	Tolerance 5%
Voltage	450 VAC	
Dielectric	Safety Metallized Polypropylene	
Terminal Type	Single .187" X .02" Quick Connect Terminals	
Operating Temperature	-25	85 °C.
Dissipation Factor	0.001	maximum @ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	2.28	0.03
Thickness (T)	0.92	0.03
Height (H)	1.46	0.03
Total Thickness (Tt)	1.52	0.06
Mounting Hole		

*Dimensions in inches*

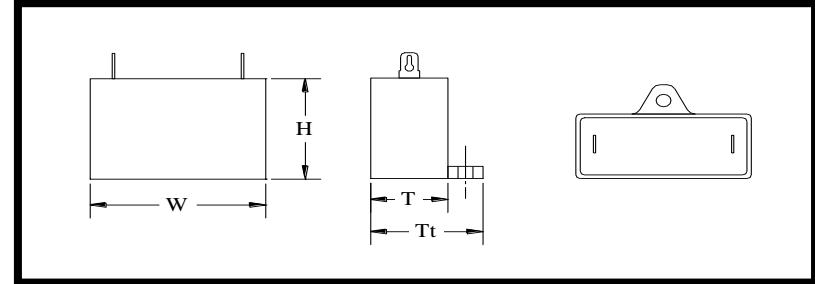

	Stamping
	SM450-40
	4 uF 5% 450 VAC
	50/60 Hz. +85 C.
	P2 - 10,000 AFC
	RU cRU & TUV
RoHs	
Date Code	

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval: J.D. Aldana  
 Date January 27, 2006