


Part Number	ADPS475E355J		Revision
Customer P/N			Revision
Capacitance	3.5	uF.	Tolerance 5%
Voltage	475	VAC	
Dielectric	Safety Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.89	0.03
Thickness (T)	0.67	0.03
Height (H)	1.10	0.03
Total Thickness (Tt)	1.14	0.03
Mounting Hole	0.17	0.01

Dimensions in inches

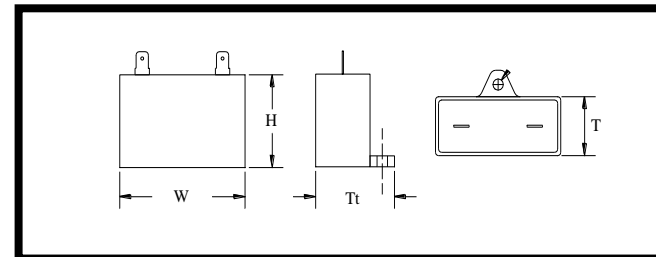

Stamping	Logo/ADPS
	3.5 uF 5% 475 VAC
	50/60 Hz -40 - +85 C
	P2 - 10,000 AFC
	Motor Cap - CBB61-A
	RU, cRU, RoHS
	Date Code



G = RoHs compliant

UL Approved Capacitor

Protected Capacitor: Segmented Metallized Polypropylene Film

Approval JD Aldana
 Date November 28, 2018