


Part Number	ADPS500E755J		Revision
Customer P/N	195-500-0500		Revision
Capacitance	7.5	uF.	Tolerance 5%
Voltage	500	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-40		85 °C.
Dissipation Factor	0.001		maximum @ 60 Hz.

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.89	0.04
Thickness (T)	1.04	0.04
Height (H)	1.46	0.04
Total Thickness (Tt)	1.48	0.04
Mounting Hole	0.18	0.02
Lead Spacing (Ls)	1.69	0.04

*Dimensions in inches*

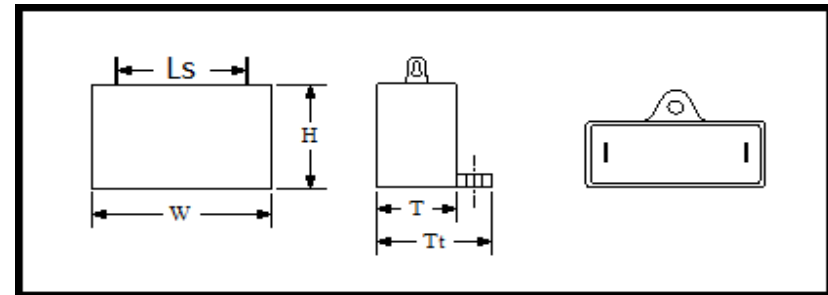

Stamping	ADPS
	7.5 uF 5% 500 VAC
	50/60 Hz -40 - +85 C
	P2 - 10,000 AFC
	Motor Cap - CBB61
	195-500-0500
	RU, cRU RoHs Date Code



UL Approved Capacitor

**Black Color Case ONLY**  
**Protected Capacitor: Segmented Metallized Polypropylene Film**  
**Terminals to be oriented along "T" dimension.**

Approval: J.D. Aldana  
 Date September 10, 2012