

Part Number	CBB20-400S105		Revision	
Customer P/N			Revision	
Capacitance	1	uF.	Tolerance	5%
Voltage	400	VAC		
Dielectric		Polypropylene		
Terminal Type		Axial Solid Wire		
Operating Temperature	-55 °C.	to	100 °C.	
Dissipation Factor	0.002	maximum	@ 120 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com


info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	0.51	0.05
Thickness (T)	0.51	0.05
Length (L)	1.21	0.06
Lead Length (S)	1.75	min.
Lead Gauge (d)	20	AWG

Dimensions in inches

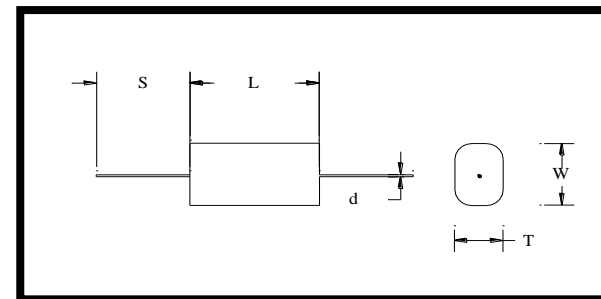

Stamping	AD MotorCap
	1.0 MFD 5%
	400 - VDC



Engineer JD Aldana
Date June 28, 2016